

ANDRIS LUX 6



JEDNOSTAVNA
PROVJERA



TITANIJ
PLUS



VANJSKA
REGULACIJA
TEMPERATURE




PROIZVEDENO
U ITALIJI

Jednostavna uporaba i izdržljivost

- / Prednja regulacija temperature
- / Unutarnji spremnik emaljiran titanijem
- / Ekološka poliuretanska izolacija
- / Magnezijiska anoda - zaštita od korozije
- / Moderna estetika
- / Kompaktne dimenzije

ENERGETSKI RAZRED

DO

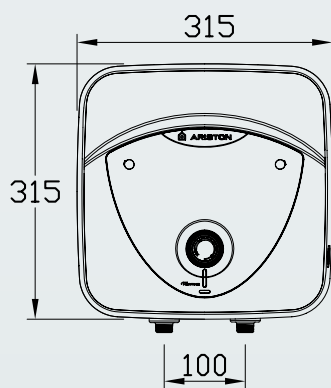

TEHNIČKI PODATCI

		6 OR	6 UR
Kapacitet	l	6	6
Ugradnja		Iznad sudopera	Ispod sudopera
Snaga	kW	1,5	1,5
Napon	V	220/240	220/240
Vrijeme zagrijavanja ($\Delta T = 45^\circ\text{C}$)	h. min	0,15	0,15
Maksimalna radna temperatura	$^\circ\text{C}$	75	75
Toplinski gubici pri 65°C	kWh/24h	0,37	0,416
Maksimalni radni tlak	bar	6	6
Masa	kg	5,1	5,1
Klasa zaštite	IP	IPX4	IPX4

UKUPNE DIMENZIJE

Visina	mm	315	315
Širina	mm	315	315
Dubina	mm	250	250

ANDRIS LUX



Erp razred

Oznaka kapaciteta

6 OR

A

XXS

6 UR

B

XXS

KOD

3626236

3626237

NAPOMENA:

Nazivni kapacitet naveden u ovom katalogu označava kategoriju proizvoda. Stvarni kapacitet proizvoda naveden je u relativnoj tehničkoj dokumentaciji.