

SHAPE ECO EVO



Maksimalne karakteristike

- / Digitalna regulacija temperature
- / NTC senzori temperature visoke preciznosti
- / Ekološka funkcija ECO EVO
- / Ekološka poliuretanska izolacija
- / Unutarnji spremnik emaljiran titanijem i ispitivan pri 16 bara
- / Velika magnezijaska anoda
- / Dvije prirubnice s 5 vijaka
- / Sigurnosni tlačni ventil ispitivan pri 8 bara
- / ABS sigurnosni paket
- / Ekskluzivni talijanski dizajn
- / Zidna ugradnja




Powered by
CoreTECH
Napredan elektronski termost



TEHNIČKI PODATCI		SHAPE ECO EVO 50 1.8 K EU	SHAPE ECO EVO 80 1.8 K EU	SHAPE ECO EVO 100 1.8 K EU
Nazivni kapacitet	l	50	80	100
Montaža	V	V	V	V
Snaga	kW	1,8	1,8	1,8
Napon	V	230	230	230
Vrijeme zagrijavanja ($\Delta T=45^{\circ}\text{C}$)	h,min	1,32	2,27	3,03
Toplinski gubici pri 65°C	kWh/24h	0,8	0,94	1,08
Maks. radni tlak	bar	8	8	8
Maks. radna temperatura	$^{\circ}\text{C}$	80	80	80
Masa	kg	19	23,5	27
Klasa zaštite	IP	IPX4	IPX4	IPX4
UKUPNE DIMENZIJE				
a	mm	570	775	927
b	mm	379	584	736
c	mm	191	191	191

SHAPE ECO EVO		50	80	100
	Energetski razred	C	C	C
	Profil kapaciteta	M	M	M
KOD		3626073	3626075	3626076

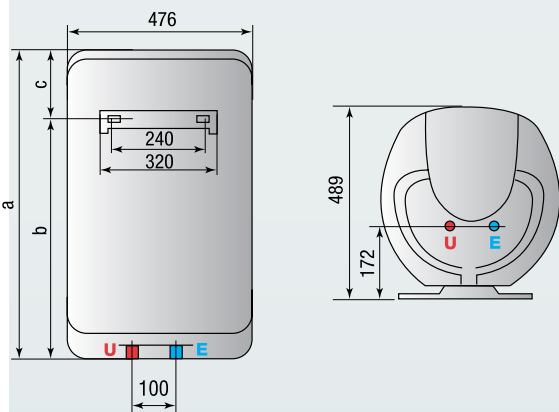

LEGENDA

- E** Ulaz hladne vode G 1/2"
U Izlaz vruće vode G 1/2"

*U usporedbi s električnim bojlerima iste veličine u skladu s europskom Uredbom o označavanju UE br. 81212013.
** Procijenjena ušteda u usporedbi s tradicionalnim električnim bojlerom, od prosječne neto potražnje tople vode (studija VHK Ecodesigna iz 2007). Promjene u uštedi ovise o kapacitetu proizvoda.